

WI-GS5024
16SFP+8GE Ports
L2 Managed Fiber Switch
Data sheet




www.wireless-tek.com

Highlights

- 8GE+16SFP Full Gigabit Fiber Switch
- L2/L3/L4 QoS and IGMP snooping optimize voice and video application
- Support STP/RSTP
- Up to 4K QVLANS simultaneously
- Link Aggregation Control Protocol (LACP)
- WEB/CLI managed modes, SNMP, bring abundant management features



Typical Applications

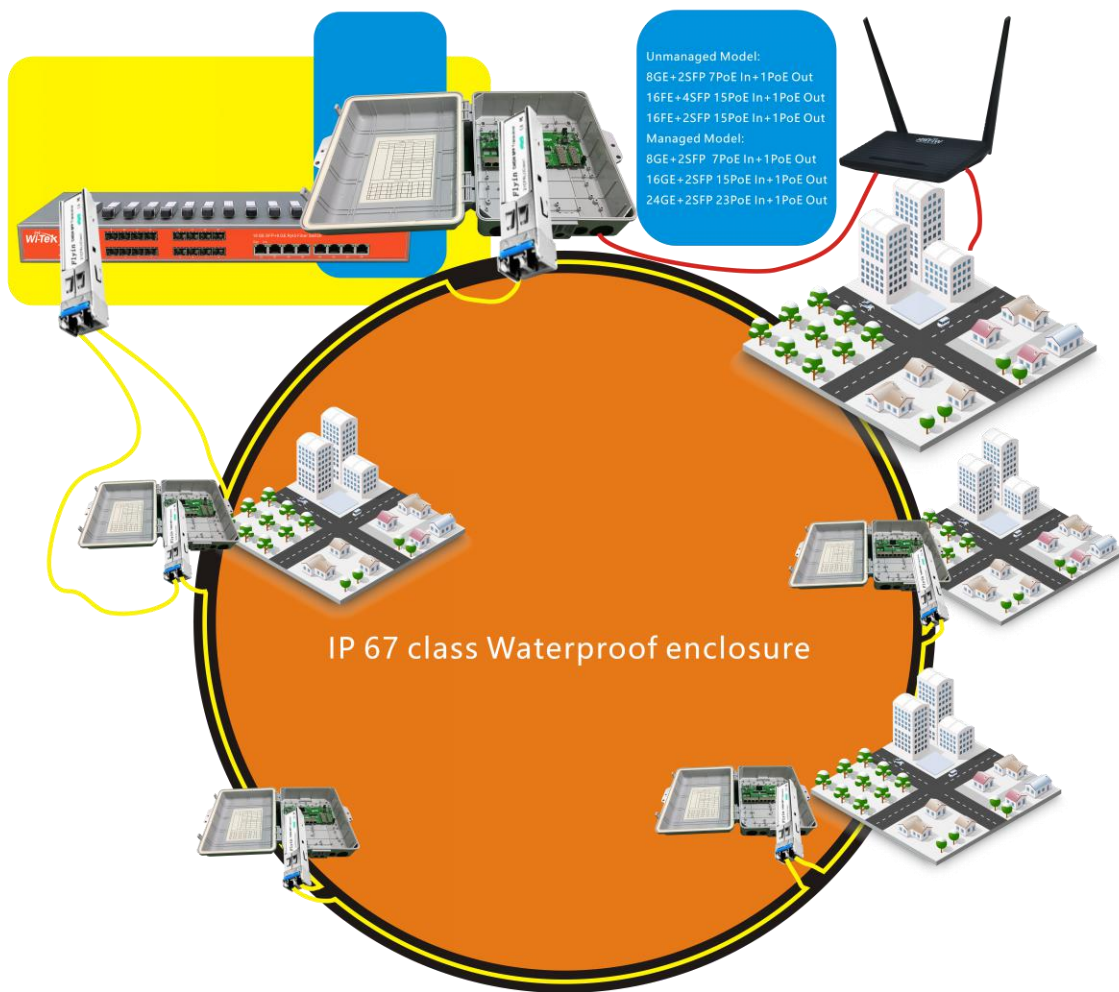

Description

What This Product Does

16SFP+8GE gigabit L2 managed switch WI-GS5024 provides 24 10/100/1000Mbps ports(include 16*SFP fiber). The switch provides high performance, enterprise-level QoS, advanced security strategies and rich layer 2 management features. Moreover, the switch also comes equipped with 16 gigabit SFP slots, expanding your network flexibly. WI- GS5024 is the cost-effective network solution for the ideal small and medium business.

WI- GS5024 has robust security and management features. The IP-MAC-Port-VID Binding and Access Control List (ACL) functions protect against broadcast storms, ARP and Denial-of-Service(DoS) attacks, etc. Quality of Service (QoS, L2 to L4) provides enhanced traffic management capabilities to move your data smoother and faster. Anymore, the easy-to-use web management interfaces, along with CLI, SNMP, mean faster setup and configuration with less downtime. For workgroup and departments requiring cost-sensitive Layer 2 Switch and gigabit capability, Wi-Tek L2 managed Switch WI-GS5024 provides you the ideal access-edge solution.

Secure Networking

Wi-Tek this WI-GS5024 provides IP-MAC-Port-VID Binding, Port Security, Storm control and DHCP Snooping which protect against broadcast storms, ARP attacks, etc. It integrates some typical DoS attacks to select. You can protect these attacks more easily ever than before. In addition, the Access Control Lists (ACL, L2 to L4) feature restricts

access to sensitive network resources by denying packets based on source and destination MAC address, IP address, TCP/UDP ports and even VLAN ID.

Advanced QoS features

To integrate voice, data and video service on one network, the switch applies rich QoS policies. Administrator can designate the priority of the traffic based on a variety of means including IP or MAC address, TCP or UDP port number, etc, to ensure that voice and video are always clear, smooth and jitter free.

Abundant Layer 2 features

For more application of layer 2 switches, WI- GS5024 supports a complete lineup of layer 2 features, including 802.1Q tag VLAN, Port Isolation, Port Mirroring, STP/RSTP, Link Aggregation Control Protocol and 802.3x Flow Control function. Any more, the switch provides advanced features for network maintenance. Such as Loop Back Detection, Cable Diagnostics and IGMP Snooping. IGMP snooping ensures the switch intelligently forward the multicast stream only to the appropriate subscribers while IGMP throttling & filtering restrict each subscriber on a port level to prevent unauthorized multicast access.

Specifications

| HARDWARE FEATURES | |
|----------------------|---|
| Interface | 8 10/100/1000Mbps RJ45 Ports (Auto Negotiation/Auto MDI/MDIX) 16 1000Mbps SFP Slots 1 Console Port |
| Network Media | 10BASE-T: UTP category 3, 4, 5 cable (maximum 100m) |

| HARDWARE FEATURES | |
|-------------------------------|--|
| | 100BASE-TX/1000Base-T: UTP category 5, 5e, 6 or above cable (maximum 100m) 1000BASE-X: MMF, SMF 1000Base-L X:62.5μm/50μm MM(2m~550m) or 10μm SMF(2m~5000m) |
| Fan Quantity | Fan |
| Power Consumption | 30W |
| Internal Power Supply | AC 110~265V 50/60HZ |
| Exchange Capacity | 56G |
| Packet Forwarding Rate | 41.67Mpps |
| Mac Address Table | 16K |
| Packet Buffer Memory | 8Mb |
| Jumbo Frame | 10240 Bytes |
| Dimensions | Product Size: 440mm* 220mm*44mm (L*W*H) |

| SOFTWARE FEATURES | |
|----------------------------|--|
| Quality of Service | Support 802.1p CoS/DSCP priority Support 4 priority queues Queue scheduling: SP, WRR, SP+WRR Port/Flow- based Rate Limiting |
| L2 Features | IGMP Snooping V1/V2/V3 802.3ad LACP (Up to 8 aggregation groups, containing 8 ports per group) Spanning Tree STP/RSTP/MSTP Port isolation BPDU filtering/guard TC/Root protect Loop back detection 802.3x Flow Control |
| VLAN | Supports up to 4K VLANs simultaneously (out of 4K VLAN IDs) Port/ MAC/Protocol-based VLAN Management VLAN configuration |
| Access Control List | L2~L4 package filtering based on source and destination MAC address, IP address, TCP/UDP ports, 802.1p, DSCP, protocol and VLAN ID; Time Range Based |
| Security | IP-MAC-Port-VID Binding IEEE 802.1X Port/MAC Based authentication, Radius, Guest |

| SOFTWARE FEATURES | |
|-------------------|--|
| | VLAN DoS Defence Dynamic ARP inspection (DAI) SSH v1/v2 SSL v2/v3/TLSv1 Port Security Broadcast/Multicast/Unknown-unicast Storm Control |
| Management | Web-based GUI and CLI management SNMP v1/v2c/v3,compatible with public MIBs DHCP/BOOTP Client,DHCP Snooping,DHCP Option82 CPU Monitoring Port Mirroring Time Setting: SNTP Integrated NDP/NTDP feature Firmware Upgrade: TFTP & Web System Diagnose: VCT SYSLOG & Public MIBS |

| OTHERS | |
|-------------------------|---|
| Certification | CE, FCC, RoHS |
| Package Contents | POE Switch Electric Line Guide Book/Warranty Card |
| Environment | Working Temperature: 0℃～40℃ Storage temperature : -40℃～70℃ |

| | |
|--|---|
| | <p>Working Humidity : 10%~90% RH non-condensing Storage Humidity: 5%~90% RH non- condensing</p> |
|--|---|