

acar S8 FA RACK

- Surge protective power strip
- + EMI/RFI filter
- + rack mount brackets



8 SOCKET OUTLETS WITH EARTHING PIN	AUTOMATIC FUSE
SOCKET OUTLETS SAFE FOR CHILDREN	SURGE PROTECTION
ILLUMINATED DOUBLE POLE MAINS SWITCH	RACK MOUNT BRACKETS
SURGE PROTECTION INDICATOR	AVAILABLE CABLE LENGTHS: 1.5m, 3m, 5m




acar S8 FA RACK is a professional device in a family of products **acar S8**, intended for installation in 19-inch rack cabinets. It features eight surge protected and earthed socket outlets, which in most cases is sufficient to power all the devices mounted in a 19-inch rack cabinet. The applied high-frequency interference suppression filter increases significantly the security of the connected devices and the automatic fuse can quickly restore the system to work. The device also has an indicator of proper operation of the surge protection. Durable, rigid and self-extinguishing plastic housing meets all requirements for devices for professional use.

Technical data: acar S8 FA RACK

Maximum load	P_{MAX} 2300W
Nominal voltage U_N	230V
Nominal frequency	50Hz
Nominal load current	$\Sigma I_N = 10A$ MAX
Surge protection response time	<25ns
Maximum voltage U_C	250V 50Hz
Protection level U_p	$\leq 1.3kV$
Nominal discharge current i_N	2kA (L/N) – 8/20 μs
Maximum discharge current i_{MAX}	6.5kA (L/N) – 8/20 μs (type 2)
Fuses	1 automatic fuse, slow blow 10A/250V
RFI/EMI attenuation	$\leq 35dB$
Anti-shock protection system	earthing pins connected to the protective earthing conductor
Number of socket outlets	8 two-pole socket outlets with earthing pin, 10A/250V
Switch	illuminated double pole mains switch
Housing	made of self-extinguishing plastic
Dimensions	445x54x55mm
Weight	0.73kg

The manufacturer reserves the right to change the technical parameters of the device, resulting from technological progress. ATTENTION! The technical data define the maximum values of surges against which the device protects.

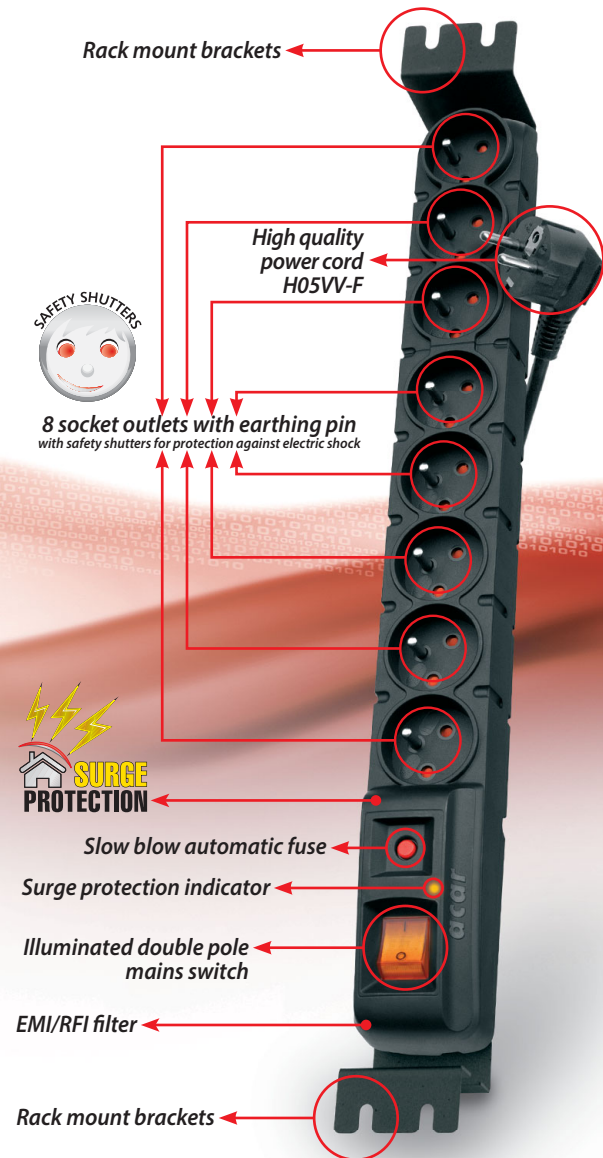

ILLUMINATED DOUBLE POLE MAINS SWITCH, SLOW-BLOW AUTOMATIC FUSE, SURGE PROTECTION INDICATOR



8 SOCKET OUTLETS 10A WITH EARTHING PIN AND SAFETY SHUTTERS



RACK MOUNT BRACKETS